


EV-MCP2-IP24 Installation instructions


1. For Surface Mounting, carefully cut/drill holes for cables/glands, in the Back Box, if required for the installation. Fix the Back Box to wall using screws provided, through the pre-drilled holes.

2. For Flush Mounting, Fix the Wall Plate to wall using screws provided.

NOTE: For Flush Mounting use 35mm Metal Knockout box or Dry lining box.



Surface Mount Back Box



Flush Mount Wall Plate

3. Set the device address using the 8-Way DIL switch on the reverse of the Unit.

4. Make the Loop connections as shown in figure 1 below, using the mating connectors provided. **NOTE:** Loop end plugs can be connected together for initial cable testing.

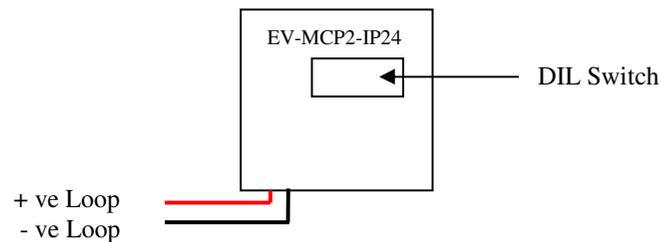


Figure 1

5. Clip the Reset Lid to the Back Box, ensuring the clip is full engaged.

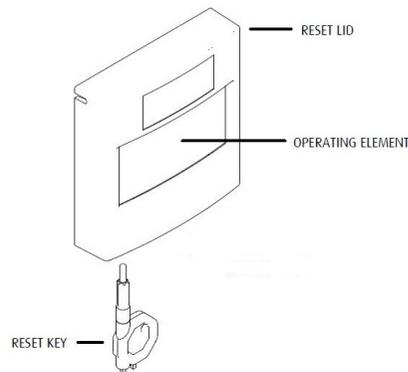


Figure 2

EV-MCP2-IP24 Installation instructions

6. To Activate the Call Point, Press the Operating Face, where indicated by the arrows, until it Clicks and the Yellow/Black flag is clearly visible.

7. To Reset the Call Point, Insert the Reset Key where shown in Figure 2 and turn anti-clockwise until it Clicks and the Yellow/Black flag has retracted from view.

| | |
|--|--|
| EV-MCP2-IP24 - Resettable Manual Call Point | |
|  | |
|  | |
| <p>Nittan Europe Ltd. Hiple Street, Old Woking, Surrey, GU22 9LQ United Kingdom</p> | <p>Tel: +44 (0) 1483 769 555 Fax: +44 (0) 1483 756 686 Email: sales@nittan.co.uk Web: www.nittan.co.uk</p> |
| D.o.P. Number: 01690 | |
| EN54-11: 2011 - Type A Indoor Manual Call Point IP24 | |
| <p>For use with Nittan Evolution Protocol Only. Loop Voltage: 20 to 35 V d.c. Quiescent Current: 200µA Alarm Current: 2mA (LED ON). Ingress Protection: IP24 Mass: 115g</p> | |
| Technical Data Sheet: TD-EV-MCP2-IP24 | |