





■ Features

- Equipped with alarm bell, indication lamp and manual call point
- Vertical-mount type
- Easy installation and cable wiring by Built-in terminal block
- Surface and recessed mountings are available

■ Drawings

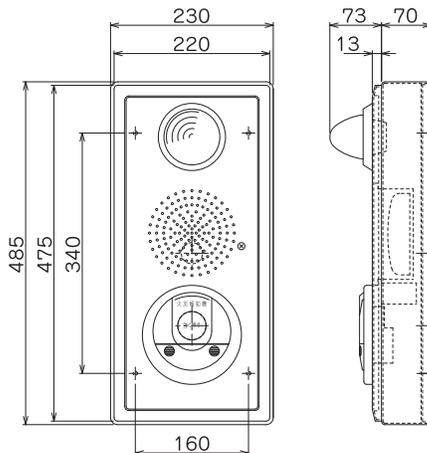

SRT-01M6L-47SGB
SRT-02M6L-47SGB

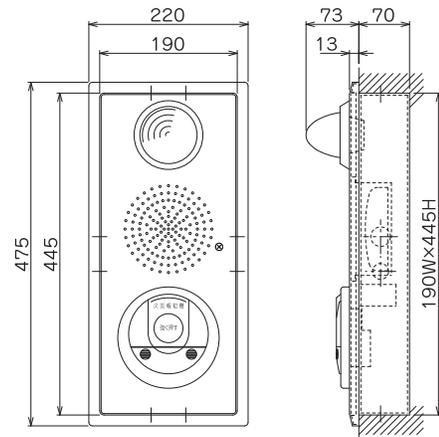

SUT-01M6L-47SGB
SUT-02M6L-47SGB

■ Specifications

| Specifications | | SRT-01M6L-47SGB | SRT-02M6L-47SGB | SUT-01M6L-47SGB | SUT-02M6L-47SGB |
|--------------------------|-----------------------|--|-------------------|--------------------|--------------------|
| Mounting Type | | Vertical, Surface | Vertical, Surface | Vertical, Recessed | Vertical, Recessed |
| Telephone Jack | | ✓ | N/A | ✓ | N/A |
| Accessories | Alarm Bell | BD-6-24-11 | | | |
| | Indication Lamp | PL-R4-LED | | | |
| | Manual Call Point | 1MF1A | 2ME1A | 1MF1A | 2ME1A |
| | Surface Mounting Box | SR-47-06 | SR-47-06 | N/A | N/A |
| | Recessed Mounting Box | N/A | N/A | SU-445-03 | SU-445-03 |
| Plate Cover, Push Button | | Japanese indication *Modifiable to English version | | | |
| Operating Temperature | | -10°C to +50°C | | | |
| Box Material | | Steel | | | |
| Weight c/w Box | | 4.5 kg | 4.5 kg | 4.5 kg | 4.5 kg |