




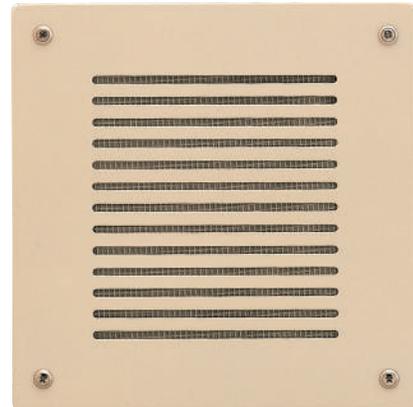

BD-6-24-11

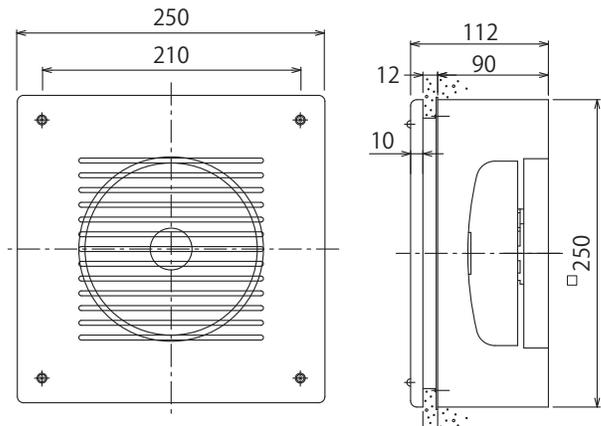

BDU-6-24-11

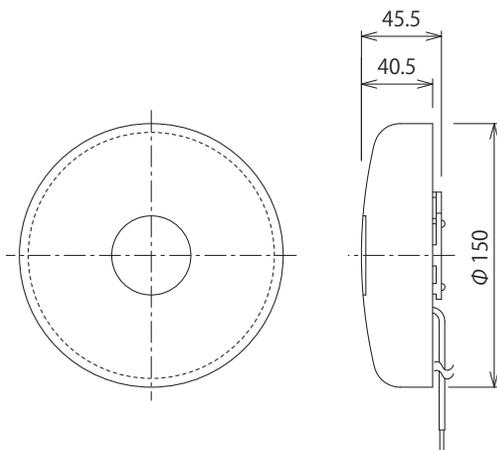

Ordering Information

Model Name	Description
BD-6-24-11	Local Alarm Bell c/w a mounting hook
BDU-6-24-11	Local Alarm Bell, Recessed Mount Type c/w BU-6-02, BU-6-05 and a mounting hook
BU-6-02	Recessed Mount Box for ϕ 150 Bell
B-6-06	Surface Mount Box for ϕ 150 Bell
BU-6-05	Cover Plate for ϕ 150 Bell

Specifications

Specifications	BD-6-24-11	BDU-6-24-11
Mounting Type	Surface	Recessed
Rated Voltage / Current	24 VDC / 10 mA	
Driving Mechanism	Electric Motor	
Minimum Operating Voltage	16 VDC	
Sound Output	90 dBA @ 1 m and more	
Termination	Provided with 1 set of leads for a conventional wiring	
Operating Temperature	- 10°C to + 50°C	
Gong Material	Aluminum Alloy	
Finish Color	Munsell 7.1R 3.6/12.8 (Red)	Munsell 2.5Y 9/1 (Beige)
Weight	450 g	3.4 kg

NOT TO BE USED FOR INSTALLATION PURPOSES.

Nittan reserves the right to make changes at any time without notice in prices, colours, materials, components, equipment, specifications and models and also to discontinue models.