

FLAT TYPE INDICATION LAMP

PL-F




Flush Mounting Image



Surface Mounting Image

■ Dimensions

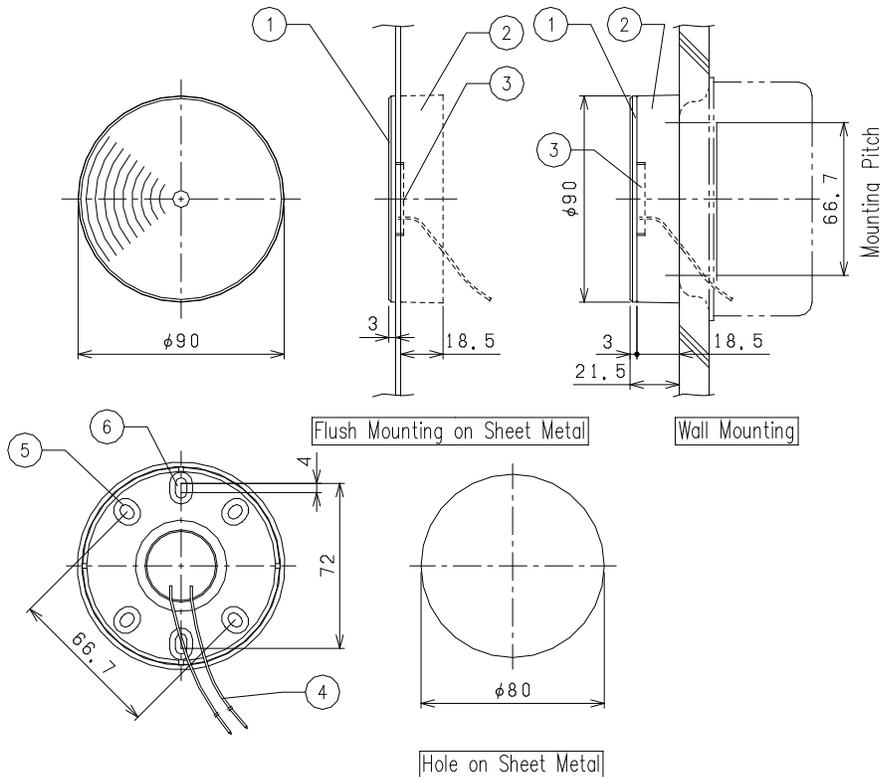

Installation Image

1. Globe
 2. Base
 3. LED Module
 4. Power Supply Line
 5. Mounting Hole 5 x 7
 6. Mounting Hole 5 x 9
- (mm)


■ Features

- Flat type LED indication lamp
- Thinness 3 mm when flush mounting
- Clear and easy to see by modulating brightness and darkness
- Compatible with existing Nittan indication lamp
- Easy to install without screws
- Weather-proof IPX3 when flush mounting
- Low current consumption 8 mA
- Capable of applying AC and DC 24V power source

■ Unique Features


Improved Visibility

Realised a clear visibility by modulating brightness and darkness.

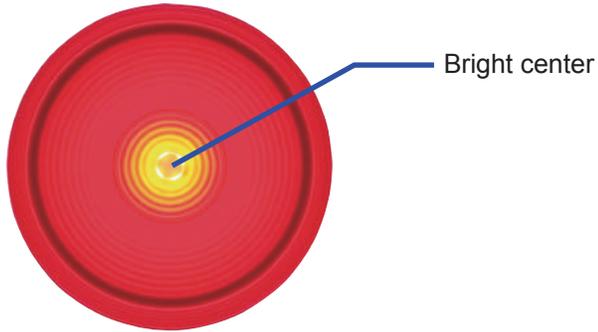

Thinness 3 mm

Realised a thinness of 3 mm when flush mounting.

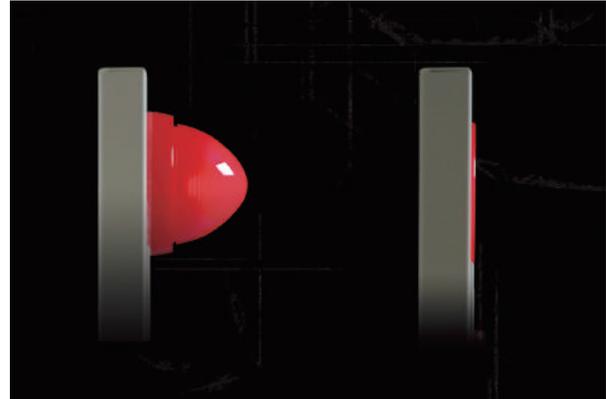


Screws Not Required for New Installation

Easy installation by just turning the base in from the back side of the board.



Compatibility

Capable of replacing Nittan existing indication lamps with flat type.

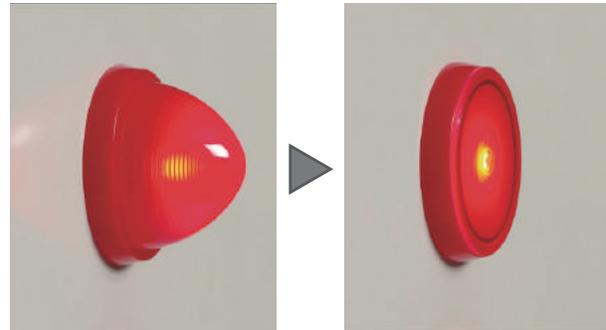

■ Specifications

Specifications	PL-F
Rating	AC / DC 24V, 8 mA
Lamp	Red LED
IP Rating	IP X3 (Weather-Proof) * Applicable only when flush mounting
Operating Temperature	-10°C to +50°C
Body Material	Self-Extinguishing Resin
Weight	75 g
Applicable Electrical Box	JIS C 8340 Medium Size Square Outlet Box
Dressing Plate	JIS C 8340 Medium Size Square Cover with Round Hole

Distributed By

All specifications are subject to change without any notice.
For more information, contact with NITTAN.

NITTAN

54-5, 1-chome, Sasazuka,
Shibuya-ku, Tokyo151-8535, Japan
TEL:81-3-5333-7021 FAX:81-3-5333-8615