


TECHNICAL DATASHEET

Part Numbers and Product Order Codes:-

| | | | | | | |
|---------------------------|---|---|---|---|---|----------------------------|
| Part Number | - | - | - | - | - | UB-4R-470 |
| Description | - | - | - | - | - | Conventional Detector Base |
| Device Type | - | - | - | - | - | Indoor mounting base |
| Computer Reference Number | - | - | - | - | - | |
| Nittan Standard | - | - | - | - | - | F03_83503 |

Technical Specifications:-

| | | | | | | |
|---------------------------|---|---|---|---|---|--------------------------------|
| Operating Voltage | - | - | - | - | - | 10 to 32 Vdc |
| Operating Temperature | - | - | - | - | - | - 10°C to + 55°C |
| Storage Temperature | - | - | - | - | - | - 25°C to + 70°C |
| Relative Humidity | - | - | - | - | - | ≤ RH95% non-condensing. |
| Material | - | - | - | - | - | ABS |
| Dimensions | - | - | - | - | - | Ø104.50mm x 15.00mm |
| Mass | - | - | - | - | - | 54g |
| EMC Conformance | - | - | - | - | - | EMC conformance to BSEN50130-4 |
| CE Conformity | - | - | - | - | - | Yes |
| Standards / Certification | - | - | - | - | - | Complies with EN54-5, 7 |

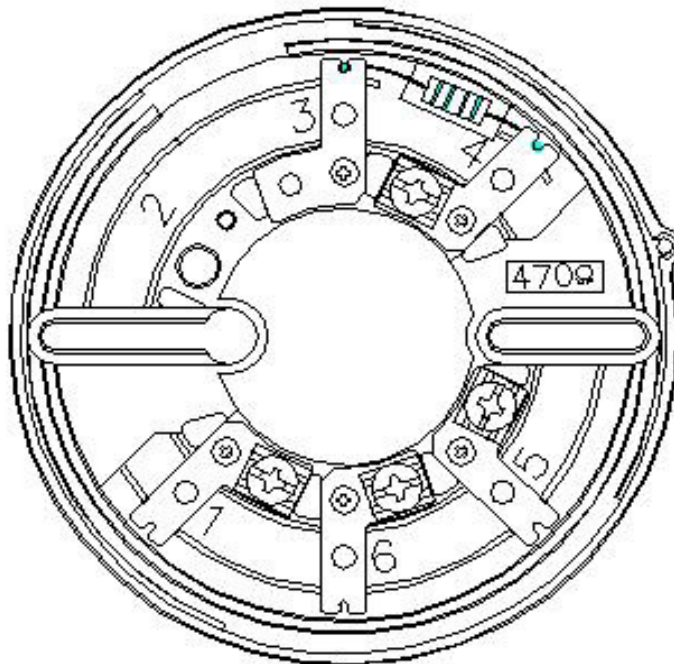

Conventional Termination

- 1 = -VE in
- 6 = - VE out
- 4 = + VE in/out
- 5 = RIL -VE 2mA