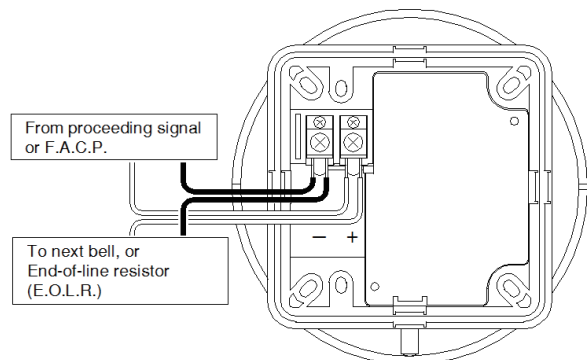## ALARM BELL   EVCA-B-6-24
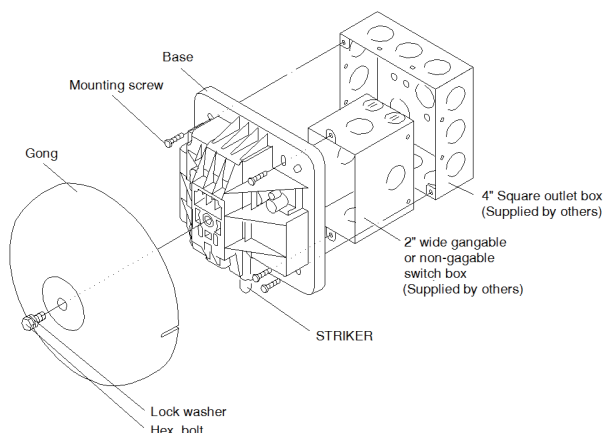

■ Features

- Conventional fire alarm bell
- 150mm (6 inch)
- Rating 10 mA@24 VDC
- Min. Sound Output : 75.6 dBA@10 ft per UL464
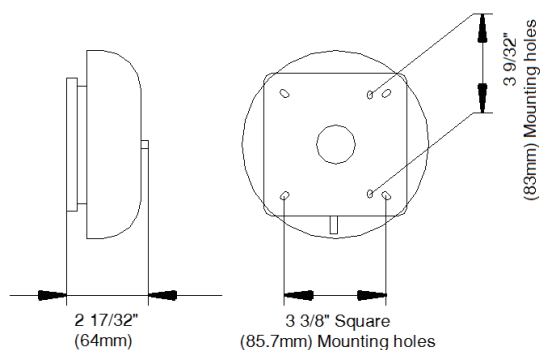
■ Installation

Wiring (rear view) Observe Polarity

From proceeding signal or F.A.C.P.

To next bell, or End-of-line resistor (E.O.L.R.)

Surface Installation

- Base
- Mounting screw
- Gong
- 4" Square outlet box (Supplied by others)
- 2" wide gangable or non-gagable switch box (Supplied by others)
- STRIKER
- Lock washer
- Hex. bolt

■ Specifications

Dimensions

3 9/32" (83mm) Mounting holes

2 17/32" (64mm)

3 3/8" Square (85.7mm) Mounting holes

Specifications	EVCA-B-6-24
Operating Voltage	24 VDC
Max. RMS Operating Current	19-33 VDC : 13.5mA 19-33V FWR : 24.5mA
Min. Sound Output	75.6 dBA@10 ft per UL464
Operating Temperature	- 10°C to + 40°C
Option Parts	BBX-4 water proof back box

EVCA-B-6-24-DAT-02   Rev.2